



Stainless steel multistage vertical pumps. Suitable for clean non-loaded fluids, pressurizing system, irrigation, drinking and glycol water, water treatment, food industry, heating and air conditioning, washing system.

Construction features


Pump body	EN 1.4401 / AISI 316
Motor bracket	cast iron
Impellers, diffusers, shell, pump shaft	EN 1.4401 / AISI 316
Mechanical seal	silicon carbide-graphite-EPDM
Intermediate bush	tungsten carbide
Ambient temperature	max 40 °C
Liquid temperature	-15 ÷ +120 °C (Max 85° for domestic use)
Max operating pressure	max 26 bar
Pump body gasket	EPDM

Motor

2 poles induction motor	3~ 230/400V - 50Hz P ≤ 4kW, size B14 V1 3~ 400/690V - 50Hz P > 4kW, size B5 V1 IE3 efficiency class
Insulation class	F
Protection degree	IP55




P 18 H X - 100 / 1 T -2

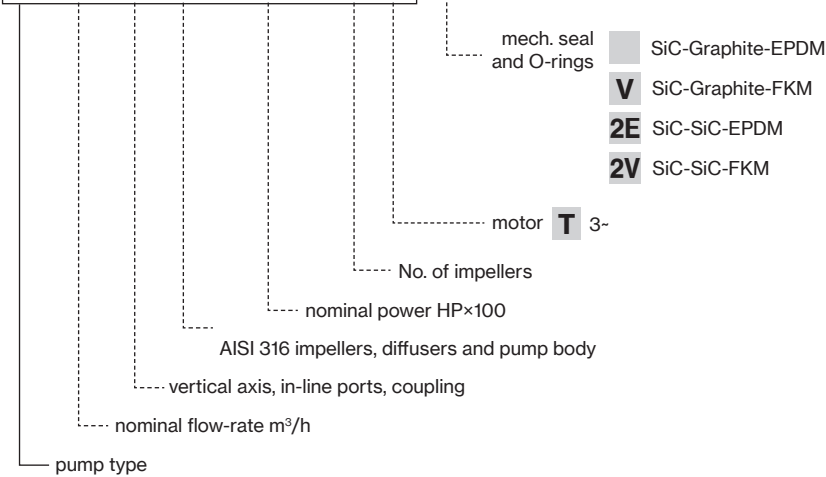



PLUS 18-22

TYPE - 50 Hz	P2		Q (l/min - m³/h - US gpm)											
3~			0	133,3	150	166,7	183,3	200	216,7	233,3	266,7	300	350	400
			0	8	9	10	11	12	13	14	16	18	21	24
			0	35,2	39,6	44,0	48,4	52,8	57,2	61,6	70,3	79,1	92,3	105,5
	HP	kW	H (m)											
P 18HX-100/1T	1	0,75	13,0	11,7	11,6	11,4	11,1	10,8	10,4	10,1	9,1	7,9	5,6	
P 18HX-200/2T	2	1,5	27,1	24,3	23,9	23,5	22,9	22,3	21,7	21,1	19,3	17,2	13,1	8,0
P 18HX-300/3T	3	2,2	41,2	37,4	36,7	36,1	35,3	34,4	33,6	32,7	30,1	27,1	20,8	13,5
P 18HX-400/4T	4	3	55,1	50,2	49,3	48,5	47,5	46,3	45,2	44,0	40,6	36,6	28,2	18,5
P 18HX-550/5T	5,5	4	72,3	64,7	63,7	62,6	61,5	60,1	58,5	57,2	53,6	48,7	38,9	27,6
P 18HX-750/6T	7,5	5,5	88,0	80,1	78,9	77,7	76,4	74,9	73,3	71,7	68,0	62,4	51,3	37,5
P 18HX-750/7T	7,5	5,5	102,5	93,0	91,5	90,1	88,6	86,8	84,9	83,0	78,6	72,0	59,1	43,0
P 18HX-1000/8T	10	7,5	116,9	105,9	104,2	102,6	100,8	98,8	96,5	94,4	89,3	81,7	66,9	48,5
P 18HX-1000/9T	10	7,5	131,2	118,5	116,6	114,8	112,7	110,4	107,9	105,5	99,7	91,1	74,3	53,6
P 18HX-1500/10T	15	11	147,3	134,1	132,1	130,1	127,9	125,5	122,8	120,2	114,1	104,8	86,3	63,4
P 18HX-1500/11T	15	11	161,7	147,1	144,9	142,7	140,3	137,6	134,6	131,7	125,0	114,7	94,4	69,2
P 18HX-1500/12T	15	11	176,2	160,0	157,6	155,2	152,6	149,6	146,3	143,2	135,7	124,5	102,3	74,8
P 18HX-1500/13T	15	11	190,6	172,9	170,3	167,7	164,8	161,6	158,0	154,6	146,4	134,2	110,1	80,3
P 18HX-1500/14T	15	11	204,9	185,7	182,9	180,0	176,9	173,4	169,5	165,9	157,0	143,8	117,8	85,7
P 18HX-2000/15T	20	15	220,7	200,2	197,2	194,2	190,8	187,1	183,0	179,0	169,7	155,7	127,8	93,4
P 18HX-2000/16T	20	15	235,1	213,1	209,8	206,6	203,0	199,0	194,6	190,4	180,3	165,3	135,6	98,9
P 18HX-2000/17T	20	15	249,4	225,9	222,4	219,0	215,1	210,9	206,1	201,6	190,9	174,8	143,3	104,2

TYPE - 50 Hz	P2		Q (l/min - m³/h - US gpm)											
0			166,7	183,3	200	216,7	233,3	266,7	300	350	400	433,3	466,7	
0			10	11	12	13	14	16	18	21	24	26	28	
0			44,0	48,4	52,8	57,2	61,6	70,3	79,1	92,3	105,5	114,3	123,1	
3~	HP	kW	H (m)											
P 22HX-200/1T	2	1,1	14,3	12,9	12,8	12,5	12,2	11,9	11,4	10,5	9,0	6,7	4,0	
P 22HX-300/2T	3	2,2	29,7	26,9	26,6	26,3	26,0	25,5	24,5	23,3	20,7	17,1	13,9	10,6
P 22HX-400/3T	4	3	45,0	40,9	40,4	39,9	39,2	38,5	37,2	35,5	31,6	25,8	21,5	16,6
P 22HX-550/4T	5,5	4	62,2	55,7	54,9	54,2	53,7	52,8	50,9	49,0	44,0	36,8	31,1	25,2
P 22HX-750/5T	7,5	5,5	78,6	70,8	69,9	69,0	68,5	67,4	65,1	62,8	56,9	47,9	41,0	33,5
P 22HX-1000/6T	10	7,5	94,2	86,2	85,1	84,1	83,2	82,2	79,7	77,3	70,0	59,4	51,3	42,0
P 22HX-1000/7T	10	7,5	109,5	99,8	98,5	97,4	96,3	95,1	92,2	89,2	80,6	68,2	58,7	47,9
P 22HX-1500/8T	15	11	126,5	116,1	114,7	113,5	112,3	111,0	107,9	104,8	95,4	81,4	70,7	58,3
P 22HX-1500/9T	15	11	142,0	130,2	128,6	127,2	125,9	124,4	120,8	117,3	106,7	90,8	78,7	64,8
P 22HX-1500/10T	15	11	157,5	144,2	142,4	140,8	139,3	137,7	133,6	129,6	117,7	100,1	86,6	71,1
P 22HX-2000/11T	20	15	174,0	159,4	157,4	155,7	154,1	152,3	147,9	143,5	130,5	111,2	96,4	79,3
P 22HX-2000/12T	20	15	189,5	173,4	171,2	169,3	167,6	165,5	160,7	155,8	141,6	120,4	104,2	85,6
P 22HX-2000/13T	20	15	204,9	187,3	184,9	182,8	180,9	178,7	173,4	168,1	152,5	129,5	111,9	91,7
P 22HX-2000/14T	20	15	220,3	201,1	198,5	196,2	194,1	191,7	186,0	180,2	163,2	138,4	119,4	97,7
P 22HX-2500/15T	25	18,5	237,4	218,1	215,4	213,1	211,0	208,6	202,6	196,8	179,4	153,1	133,0	109,7
P 22HX-2500/16T	25	18,5	252,9	232,2	229,4	226,9	224,6	222,0	215,6	209,4	190,7	162,7	141,1	116,3
P 22HX-2500/17T	25	18,5	268,5	246,3	243,3	240,6	238,2	235,4	228,6	221,9	202,0	172,1	149,2	122,8

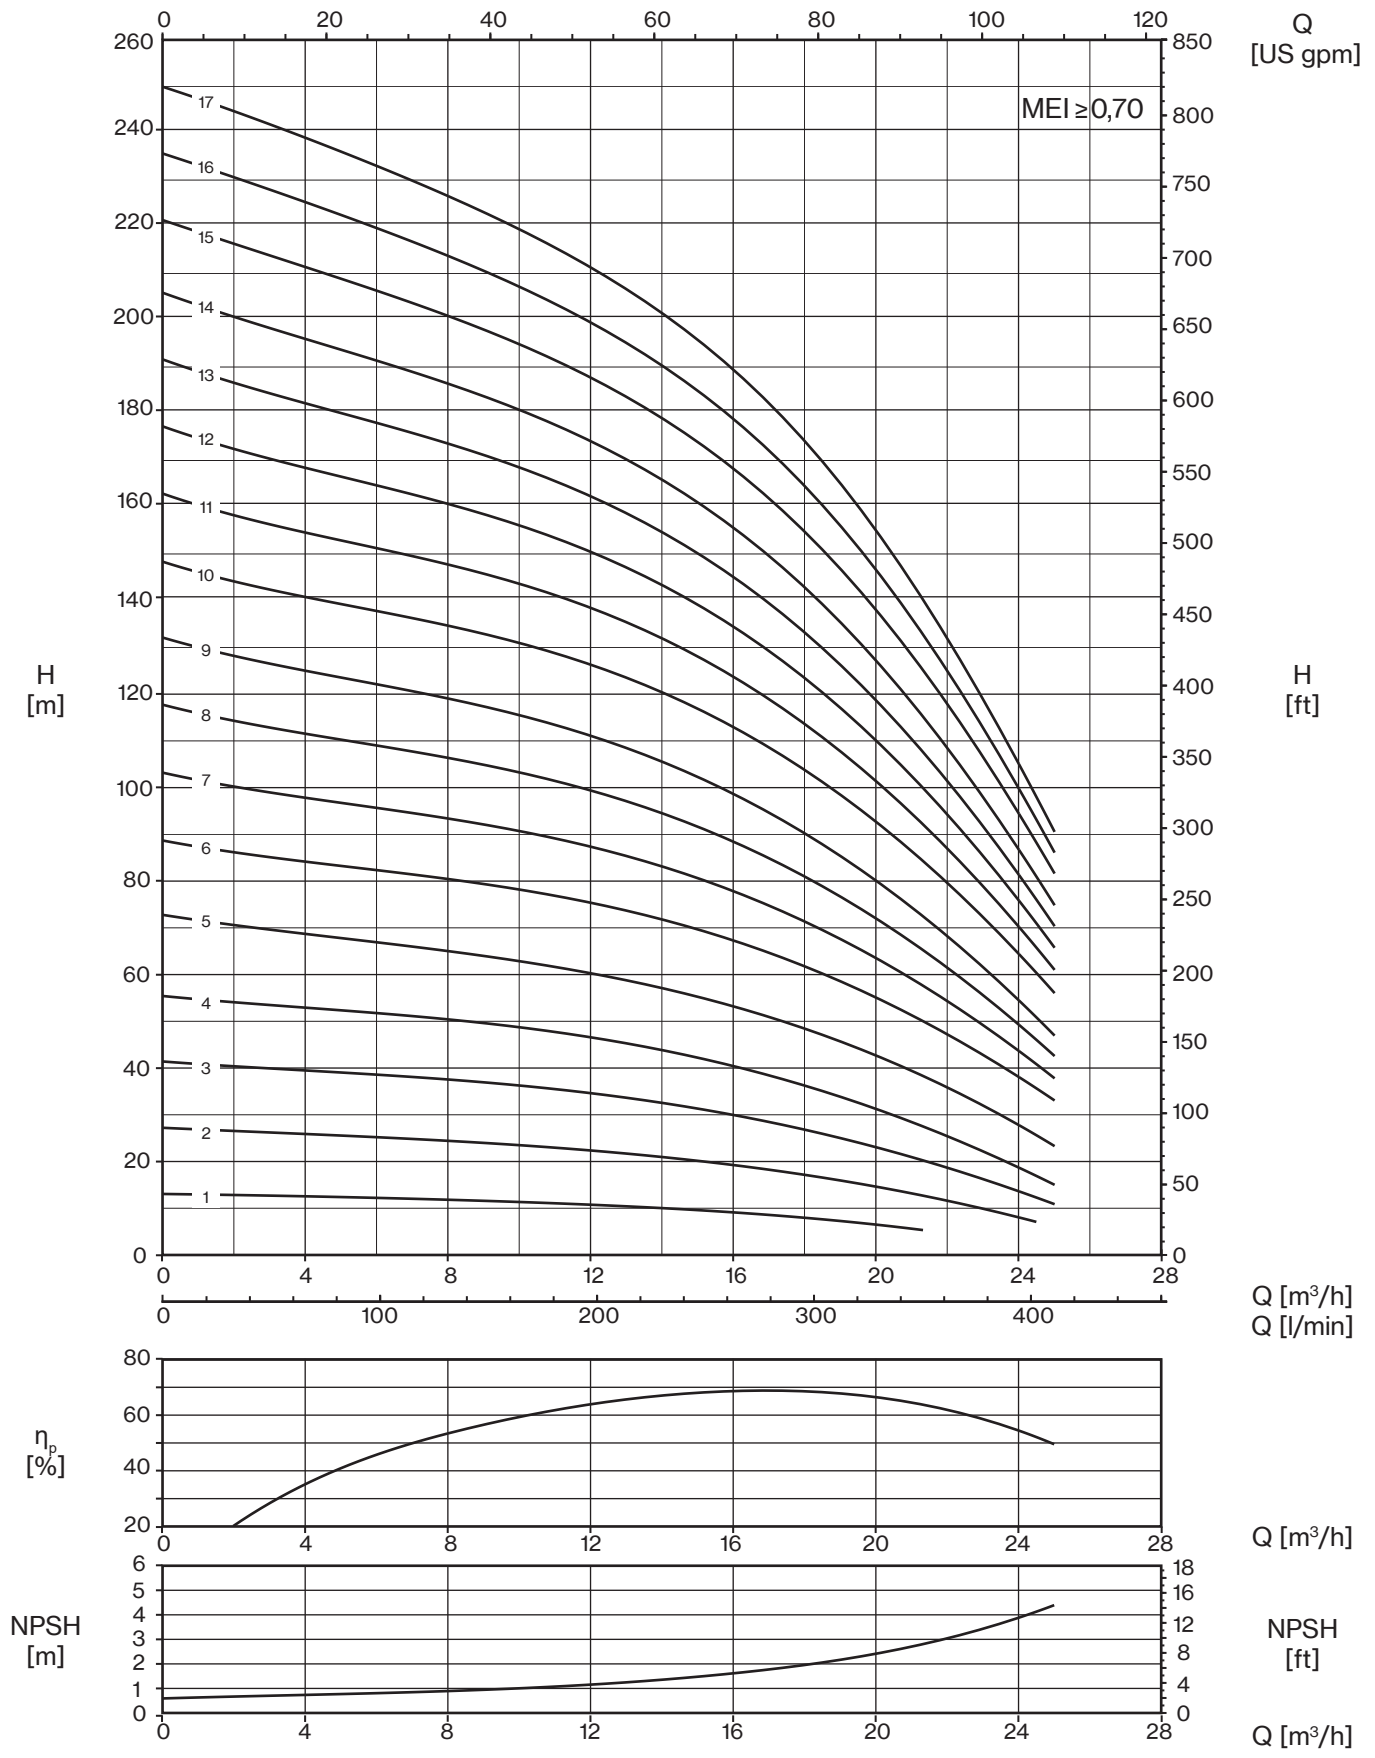

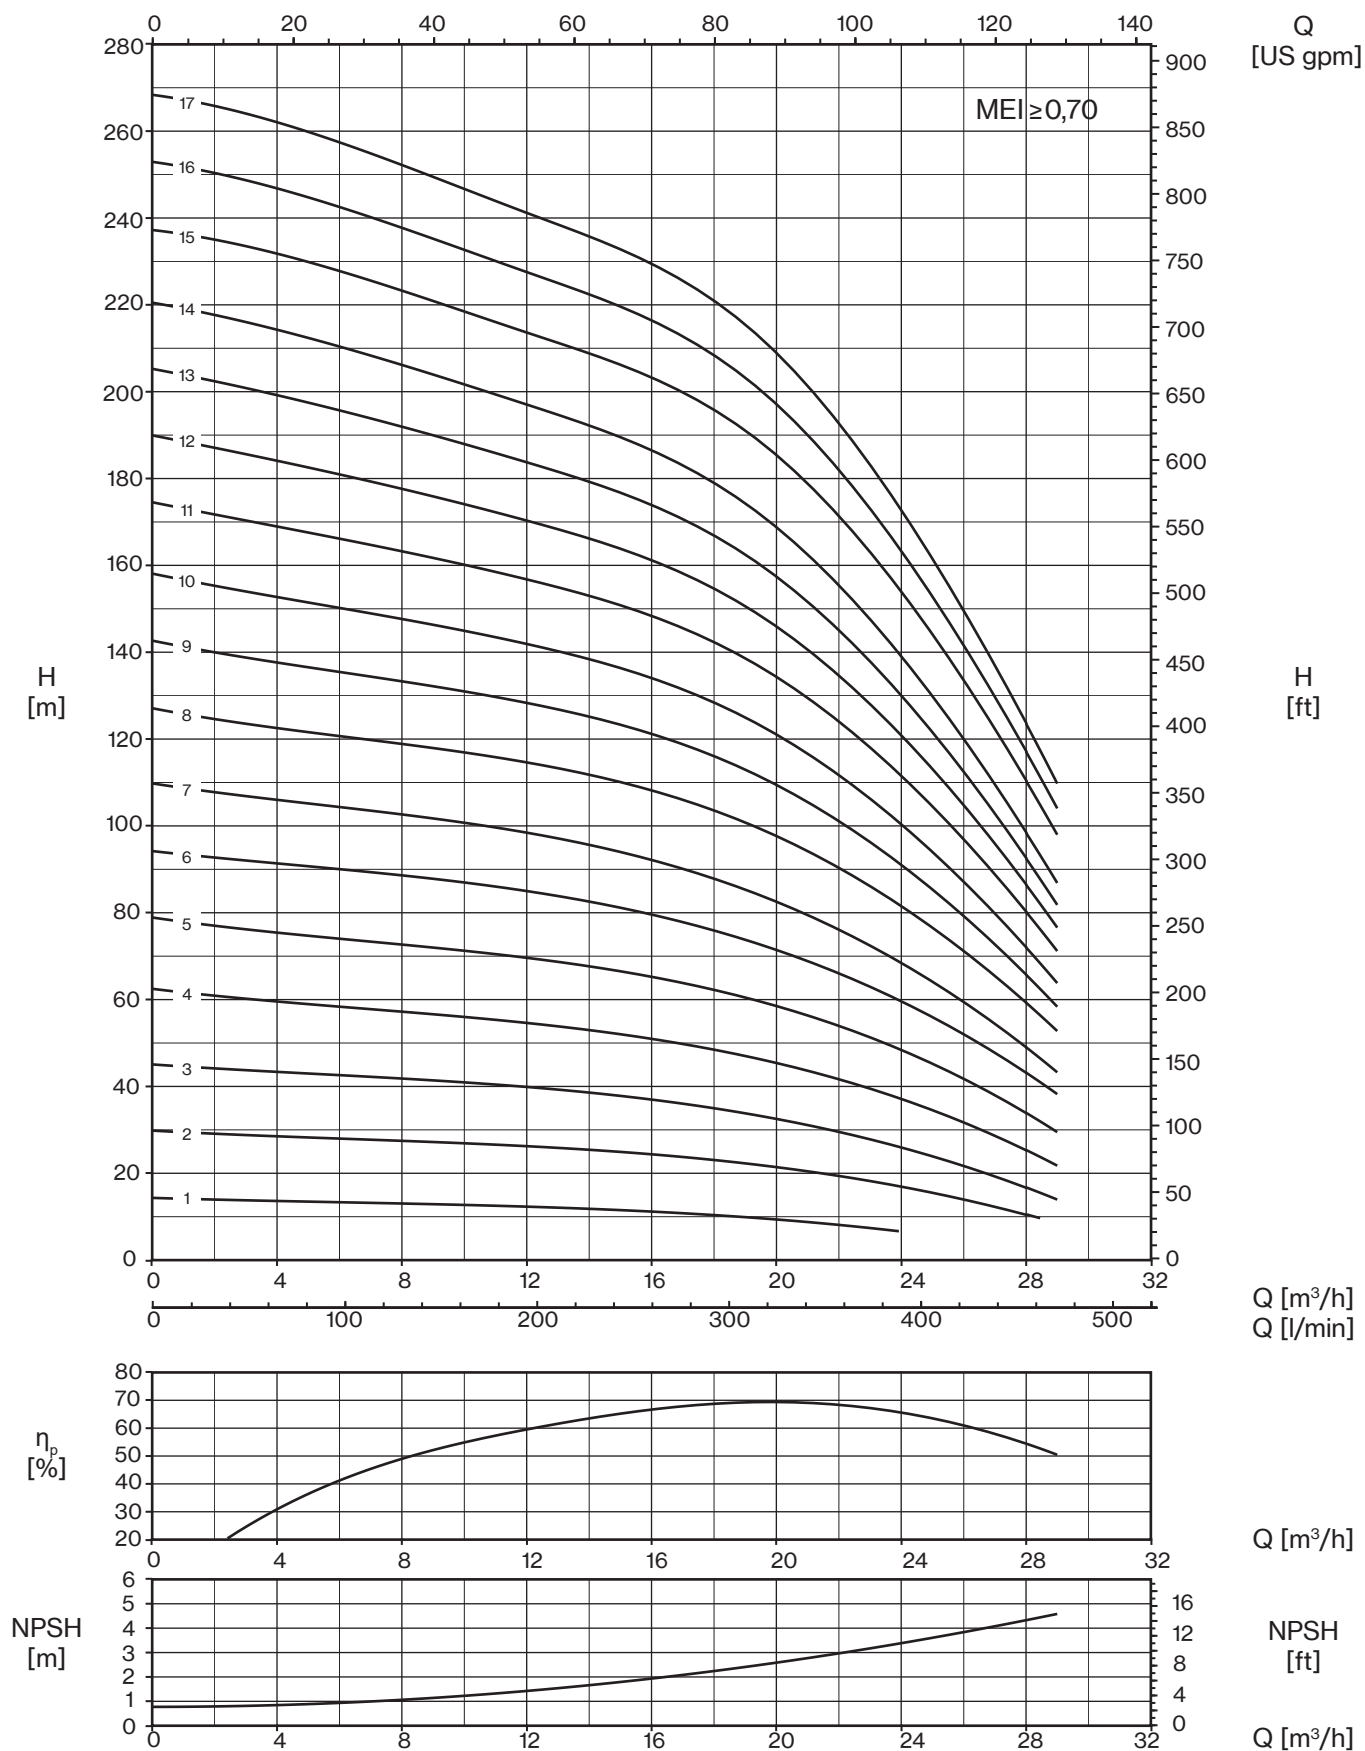


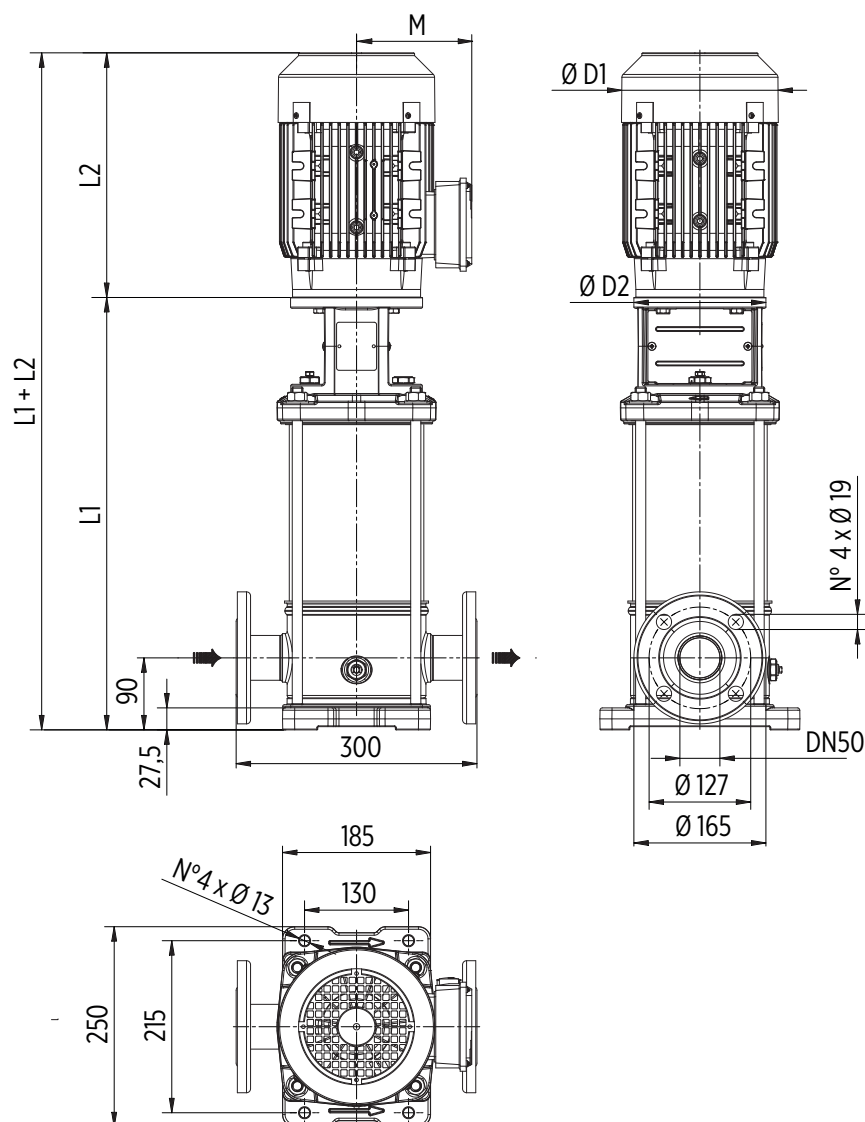

Round flanges on body type PN25/40: the pump is supplied without counterflanges (optional accessories, including bolts and joints)

TYPE	MOTOR		DIMENSIONS (mm)						Kg		
	kW	Dim	L1	L2	M	D1	D2	L1+L2	Pump	Motor	Electric Pump
P 18HX-100/1T	0,75	80	396	243	130	157	170	639	19	17	36
P 18HX-200/2T	1,5	90	396	280	145	177	170	676	20	23	43
P 18HX-300/3T	2,2	90	444	308	145	177	170	752	21,5	26	47,5
P 18HX-400/4T	3	100	492	333	157	205	170	825	22,5	35	57,5
P 18HX-550/5T	4	112	540	350	177	220	170	890	24	43	67
P 18HX-750/6T	5,5	132	800	400	197	256	300	1200	45,5	66	111,5
P 18HX-750/7T	5,5	132	848	400	197	256	300	1248	46,5	66	112,5
P 18HX-1000/8T	7,5	132	896	400	197	256	300	1296	48	73	121
P 18HX-1000/9T	7,5	132	944	400	197	256	300	1344	49,5	73	122,5
P 18HX-1500/10T	11	160	1012	503	255	315	350	1515	54	120	174
P 18HX-1500/11T	11	160	1060	503	255	315	350	1563	55,5	120	175,5
P 18HX-1500/12T	11	160	1108	503	255	315	350	1611	57	120	177
P 18HX-1500/13T	11	160	1156	503	255	315	350	1659	58,5	120	178,5
P 18HX-1500/14T	11	160	1204	503	255	315	350	1707	60	120	180
P 18HX-2000/15T	15	160	1252	503	255	315	350	1755	61	132	193
P 18HX-2000/16T	15	160	1300	503	255	315	350	1803	62,5	132	194,5
P 18HX-2000/17T	15	160	1348	503	255	315	350	1851	64	132	196

22 HX

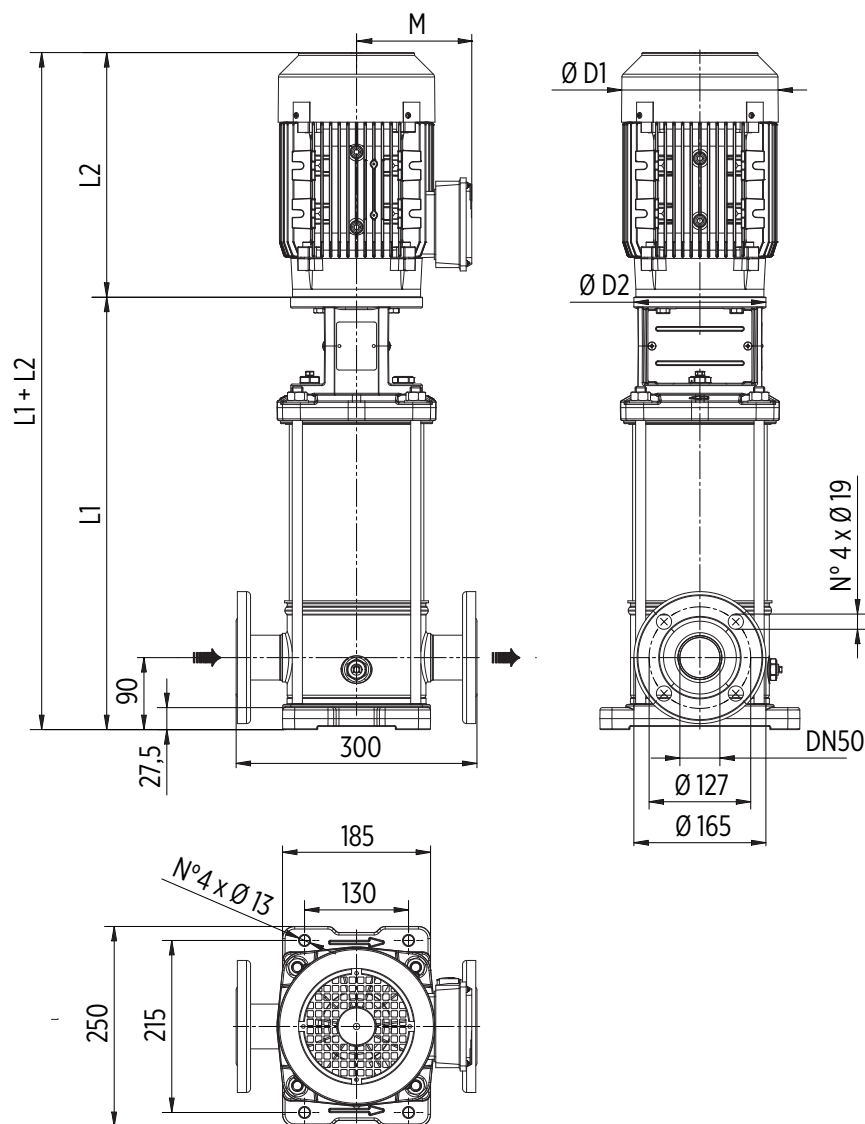

Round flanges on body type PN25/40: the pump is supplied without counterflanges (optional accessories, including bolts and joints)

TYPE	MOTOR		DIMENSIONS (mm)						Kg		
	kW	Dim	L1	L2	M	D1	D2	L1+L2	Pump	Motor	Electric Pump
P 22HX-200/1T	1,1	80	396	243	130	157	170	639	19	18	37
P 22HX-300/2T	2,2	90	396	308	145	177	170	704	20	26	46
P 22HX-400/3T	3	100	444	333	157	205	170	777	21,5	35	56,5
P 22HX-550/4T	4	112	492	350	177	220	170	842	22,5	43	65,5
P 22HX-750/5T	5,5	132	752	400	197	256	300	1152	44	66	110
P 22HX-1000/6T	7,5	132	800	400	197	256	300	1200	45,5	73	118,5
P 22HX-1000/7T	7,5	132	848	400	197	256	300	1248	46,5	73	119,5
P 22HX-1500/8T	11	160	916	503	255	315	350	1419	51,5	120	171,5
P 22HX-1500/9T	11	160	964	503	255	315	350	1467	53	120	173
P 22HX-1500/10T	11	160	1012	503	255	315	350	1515	54,5	120	174,5
P 22HX-2000/11T	15	160	1060	503	255	315	350	1563	55,5	132	187,5
P 22HX-2000/12T	15	160	1108	503	255	315	350	1611	57	132	189
P 22HX-2000/13T	15	160	1156	503	255	315	350	1659	58,5	132	190,5
P 22HX-2000/14T	15	160	1204	503	255	315	350	1707	60	132	192
P 22HX-2500/15T	18,5	160	1252	598	252	315	350	1850	61,5	150	211,5
P 22HX-2500/16T	18,5	160	1300	598	252	315	350	1898	62,5	150	212,5
P 22HX-2500/17T	18,5	160	1348	598	252	315	350	1946	64	150	214

PLUS HS-HX Serie-Mechanical seal and bearings

CARTRIDGE MECHANICAL SEAL	PUMP MODEL	SHAFT		STANDARD MATERIAL	OPTIONAL		
					V	2	2V
	P18-100/1T, P18-200/2T, P18-300/3T, P18-400/4T, P18-550/5T, P18-750/6T, P18-750/7T, P18-1000/8T, P18-1000/9T, P18-1500/10T, P18-1500/11T, P18-1500/12T, P18-1500/13T, P18-1500/14T, P18-2000/15T, P18-2000/16T, P18-2000/17T, P22-150/1T, P22-300/2T, P22-400/3T, P22-550/4T, P22-750/5T, P22-1000/6T, P22-1000/7T, P22-1500/8T, P22-1500/9T, P22-1500/10T, P22-2000/11T, P22-2000/12T, P22-2000/13T	16mm	Rotating face Stationary face Elastomer	SiC Graphite EPDM	SiC Graphite FKM	SiC SiC EPDM	SiC SiC FKM
	P35-300/1T, P35-550/2-2RT, P35-550/2-1RT, P35-750/2T, P35-750/3-2RT, P35-1000/3-1RT, P35-1000/3T, P35-1000/4-2RT, P35-1500/4-1RT, P35-1500/4T, P35-1500/5-2RT, P35-1500/5-1RT, P35-2000/5T, P35-2000/6-2RT, P35-2000/6-1RT, P35-2000/6T, P35-2000/7-2RT, P35-2000/7-1RT, P35-2500/7T, P35-2500/8-2RT, P35-2500/8-1RT, P35-2500/8T, P35-3000/9-2RT, P35-3000/9-1RT, P35-3000/9T, P35-3000/10-2RT, P35-3000/10-1RT, P35-4000/10T, P35-4000/11-2RT, P35-4000/11-1RT, P35-4000/11T, P35-4000/12-2RT, P35-4000/12-1RT, P35-4000/12T, P35-4000/13-2RT, P35-4000/13-1RT, P35-4000/13T, P50-400/1-1RT, P50-550/1T, P50-750/2-2RT, P50-1000/2T, P50-1500/3-2RT, P50-1500/3T, P50-2000/4-2RT, P50-2000/4T, P50-2500/5-2RT, P50-2500/5T, P50-3000/6-2RT, P50-3000/6T, P50-4000/7-2RT, P50-4000/7T, P50-4000/8-2RT, P50-4000/8T, P50-5000/9-2RT, P50-5000/9T, P50-5000/10-2RT, P50-5000/10T, P50-6000/11-2RT, P50-6000/11T, P50-6000/12-2RT, P50-6000/12T, P75-550/1-1RT, P75-750/1T, P75-1000/2-2RT, P75-1500/2-1RT, P75-1500/2T, P75-2000/3-2RT, P75-2000/3-1RT, P75-2500/3T, P75-2500/4-2RT, P75-3000/4-1RT, P75-3000/4T, P75-4000/5-2RT, P75-4000/5-1RT, P75-4000/5T, P75-4000/6-2RT, P75-5000/6-1RT, P75-5000/6T, P75-5000/7-2RT, P75-5000/7-1RT, P75-6000/7T, P75-6000/8-2RT, P75-6000/8-1RT, P75-6000/8T, P90-750/1-1RT, P90-1000/1T, P90-1500/2-2RT, P90-2000/2T, P90-2500/3-2RT, P90-3000/3T, P90-4000/4-2RT, P90-4000/4T, P90-5000/5-2RT, P90-5000/5T, P90-6000/6-2RT, P90-6000/6T	22mm / Balanced seal	Rotating face Stationary face Elastomer	SiC Graphite EPDM	SiC Graphite FKM	SiC SiC EPDM	SiC SiC FKM

BEARINGS	PUMP MODEL	PUMP THRUST BEARING		MOTOR BEARING	
	P18-100/1T, P22-150/1T	-	-	6204-ZZ C3	6204-ZZ C3
	P18-200/2T, P18-300/3T, P22-300/2T, P35-300/1T	-	-	6205-ZZ C3	6205-ZZ C3
	P18-400/4T, P18-550/5T, P22-400/3T, P22-550/4T, P35-550/2-2RT, P35-550/2-1RT, P50-400/1-1RT, P50-550/1T, P75-550/1-1RT	-	-	6206-ZZ C3	6206-ZZ C3
	P18-750/6T, P18-750/7T, P18-1000/8T, P18-1000/9T, P22-750/5T, P22-1000/6T, P22-1000/7T, P35-750/2T, P35-750/3-2RT, P35-1000/3-1RT, P35-1000/3T, P35-1000/4-2RT, P50-750/2-2RT, P50-1000/2T, P75-750/1T, P75-1000/2-2RT, P90-750/1-1RT, P90-1000/1T	6212 ZZ	-	6208-ZZ C3	6208-ZZ C3
	P18-1500/10T, P18-1500/11T, P18-1500/12T, P18-1500/13T, P18-1500/14T, P18-2000/15T, P18-2000/16T, P18-2000/17T, P22-1500/8T, P22-1500/9T, P22-1500/10T, P22-2000/11T, P22-2000/12T, P22-2000/13T, P22-2000/14T, P22-2500/15T, P22-2500/16T, P22-2500/17T, P35-1500/4-1RT, P35-1500/4T, P35-1500/5-2RT, P35-1500/5-1RT, P50-1500/3-2RT, P50-1500/3T, P75-1500/2-1RT, P75-1500/2T, P90-1500/2-2RT			6309-ZZ C3	6309-ZZ C3
	P35-2000/5T, P35-2000/6-2RT, P35-2000/6-1RT, P35-2000/6T, P35-2000/7-2RT, P35-2000/7-1RT, P35-2500/7T, P35-2500/8-2RT, P35-2500/8-1RT, P35-2500/8T, P50-2000/4-2RT, P50-2000/4T, P50-2500/5-2RT, P50-2500/5T, P75-2000/3-2RT, P75-2000/3-1RT, P75-2500/3T, P75-2500/4-2RT, P90-2000/2T, P90-2500/3-2RT	6212 ZZ	7212 BEP	6311-ZZ C3	6311-ZZ C3
	P35-3000/9-2RT, P35-3000/9-1RT, P35-3000/9T, P35-3000/10-2RT, P35-3000/10-1RT, P50-3000/6-2RT, P50-3000/6T, P75-3000/4-1RT, P75-3000/4T, P90-3000/3T	6214 ZZ	7214 BEP	6312-ZZ C3	6312-ZZ C3
	P35-4000/10T, P35-4000/11-2RT, P35-4000/11-1RT, P35-4000/11T, P35-4000/12-2RT, P35-4000/12-1RT, P35-4000/12T, P35-4000/13-2RT, P35-4000/13-1RT, P35-4000/13T, P50-4000/7-2RT, P50-4000/7T, P50-4000/8-2RT, P50-4000/8T, P50-5000/9-2RT, P50-5000/9T, P50-5000/10-2RT, P50-5000/10T, P75-4000/5-2RT, P75-4000/5-1RT, P75-4000/5T, P75-4000/6-2RT, P75-5000/6-1RT, P75-5000/6T, P75-5000/7-2RT, P75-5000/7-1RT, P90-4000/4-2RT, P90-4000/4T, P90-5000/5-2RT, P90-5000/5T			6313-ZZ C3	6313-ZZ C3
	P50-6000/11-2RT, P50-6000/11T, P50-6000/12-2RT, P50-6000/12T, P75-6000/7T, P75-6000/8-2RT, P75-6000/8-1RT, P75-6000/8T, P90-6000/6-2RT, P90-6000/6T				

PLUS V/L/H + VSD

Vertical booster pump with variable speed drive

PLUS V



EPIC / EPIC-A

IPFC

PLUS L



EPIC / EPIC-A

IPFC

PLUS H



EPIC / EPIC-A

IPFC

DESCRIPTION

Vertical pump of PLUS series provided with variable speed drive EPIC, EPIC-A or IPFC. This booster pump assures a desired pressure regardless of changes on flow demand making it suitable for low or missing pressure in residential systems and industrial applications. It is required the installation of a membrane tank downstream the system.

FEATURES

- EPIC, EPIC-A or IPFC variable speed drive
- Three-phase vertical pump of PLUS series
- Pressure sensor wired to the vsd
- Cable with plug for EPIC vsd only


FUNCTIONING

If the pressure in the network drops the pump will start and gradually speeds up to provide with the set pressure. When the water demand decreases, the pressure will rise causing the pump speed to slow down and eventually to stop the pump if demand ceases. The pump will remain on standby waiting to start at the next water demand.

SELECTION

The next table shows the vertical PLUS pump models available for the assembly with EPIC, EPIC-A or IPFC. For pumps longer than 1.4m, IPFC is not assembled onto the motor fan cover but is supplied with a wall-mounting kit. Consult the catalog at the PLUS series for pump specifics and characteristic curves.

P3SL /A 100/5 T -304 3×400-50

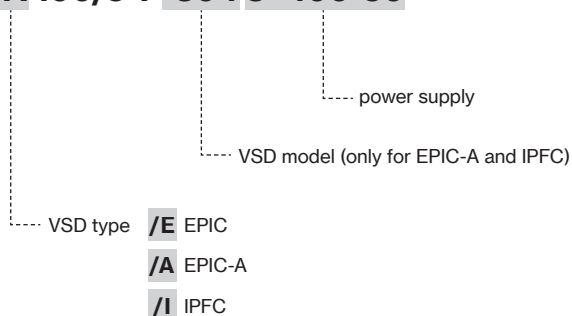

3- PUMP								VSD TYPE			
TYPE		VERSION						Power supply			
		V	SV	L	SL/SLX	LG	SLG/SLGX	1-230V		3-400V	
P 3	100/5T	■	■	■	■	-	-	EPIC	IPFC 109	EPIC-A 304	IPFC 306
	120/6T	■	■	■	■	-	-				
	150/7T	■	■	■	■	-	-				
	180/8T	■	■	■	■	-	-				
	200/9T	■	■	■	■	-	-				
	250/10T	■	■	■	■	-	-	-	IPFC 114	EPIC-A 306	IPFC 309
	280/11T	■	■	■	■	-	-				
	300/12T	■	■	■	■	-	-				
	350/14T	-	-	-	-	-	■				
	380/16T	-	-	-	-	-	■				
	400/18T	-	-	-	-	-	■				
	450/20T	-	-	-	-	-	■				
P 5	120/4T	■	■	■	■	-	-	EPIC	IPFC 109	EPIC-A 304	IPFC 306
	150/5T	■	■	■	■	-	-				
	180/6T	■	■	■	■	-	-				
	200/7T	■	■	■	■	-	-				
	250/8T	■	■	■	■	-	-				
	280/9T	■	■	■	■	-	-	-	IPFC 114	EPIC-A 306	IPFC 309
	300/10T	■	■	■	■	-	-				
	350/11T	■	■	■	■	-	-				
	380/12T	■	■	■	■	-	-				
	400/14T	-	-	-	-	-	■				
	450/16T	-	-	-	-	-	■				
	550/18T	-	-	-	-	-	■				
	600/20T	-	-	-	-	-	■				
P 7	180/4T	■	■	■	■	-	-	EPIC	IPFC 109	EPIC-A 304	IPFC 306
	250/5T	■	■	■	■	-	-				
	300/6T	■	■	■	■	-	-	-	IPFC 114	EPIC-A 306	IPFC 309
	350/7T	■	■	■	■	-	-				
	400/8T	■	■	■	■	-	-				
	450/9T	■	■	■	■	-	-				
	550/10T	■	■	■	■	-	-				
	750/12T	-	-	-	-	-	■				
	800/14T	-	-	-	-	-	■				
	900/16T	-	-	-	-	-	■				
	950/18T	-	-	-	-	-	■				
	1000/20T	-	-	-	-	-	■				
P 9	200/4T	■	■	■	■	-	-	EPIC	IPFC 109	EPIC-A 304	IPFC 306
	250/5T	■	■	■	■	-	-				
	300/6T	■	■	■	■	-	-	-	IPFC 114	EPIC-A 306	IPFC 309
	400/7T	■	■	■	■	-	-				
	450/8T	■	■	■	■	-	-				
	500/9T	■	■	■	■	-	-				
	550/10T	■	■	■	■	-	-				
	750/12T	-	-	-	-	-	■				
	800/14T	-	-	-	-	-	■				
	900/16T	-	-	-	-	-	■				
	950/18T	-	-	-	-	-	■				
	1000/20T	-	-	-	-	-	■				

3- PUMP									VSD TYPE					
TYPE		VERSION							Power supply					
		V	SV	L	SL/SLX	LG	HS	HX	1-230V	3-400V				
P 18	100/1T	-	-	-	-	-	-	■	IPFC 109	EPIC-A 304	IPFC 306			
	200/2T	-	-	-	-	-	-	■						
	300/3T	-	-	-	-	-	-	■						
	250/3T	■	■	■	■	-	-	-	IPFC 114	EPIC-A 306				
	400/4T	-	-	-	-	-	-	■						
	450/5T	■	■	■	■	-	-	-			-	-	IPFC 309	
	550/5T	-	-	-	-	-	-	■						
	550/6T	■	■	■	■	-	-	-						
	750/6T	-	-	-	-	-	-	■	IPFC 311					
	750/7T	-	-	-	-	-	-	■						
	750/8T	■	■	■	■	-	-	-	IPFC 314					
	1000/8T	-	-	-	-	-	-	■						
	1000/9T	-	-	-	-	-	-	■	IPFC 318					
	900/9T	■	■	■	■	-	-	-						
	920/10T	-	-	-	-	■	-	-						
	1000/11T	-	-	-	-	■	-	-						
	1500/10T	-	-	-	-	-	-	■						
	1500/11T	-	-	-	-	-	-	■						
	1500/12T	-	-	-	-	-	-	■						
	1500/13T	-	-	-	-	-	-	■						
	1500/14T	-	-	-	-	-	-	■						
	2000/15T	-	-	-	-	-	-	■						
	2000/16T	-	-	-	-	-	-	■						
	2000/17T	-	-	-	-	-	-	■	-	-			IPFC 330	
P 22	200/1T	-	-	-	-	-	-	■			IPFC 109	-	-	IPFC 306
	300/2T	-	-	-	-	-	-	■			IPFC 114			
	400/3T	-	-	-	-	-	-	■						
	550/4T	-	-	-	-	-	-	■			-			IPFC 309
	750/5T	-	-	-	-	-	-	■						IPFC 311
	1000/6T	-	-	-	-	-	-	■						IPFC 314
	1000/7T	-	-	-	-	-	-	■						IPFC 318
	1500/8T	-	-	-	-	-	-	■						
	1500/9T	-	-	-	-	-	-	■						IPFC 325
	1500/10T	-	-	-	-	-	-	■						
	2000/11T	-	-	-	-	-	-	■						
	2000/12T	-	-	-	-	-	-	■						
	2000/13T	-	-	-	-	-	-	■						
	2000/14T	-	-	-	-	-	-	■	IPFC 330					

3- PUMP									VSD TYPE	
TYPE		VERSION							Power supply	
		V	SV	L	SL/SLX	LG	HS	HX	1-230V	3-400V
P 35	300/1T	-	-	-	-	-	■	■	IPFC 114	IPFC 306
	550/2-2RT	-	-	-	-	-	■	■	-	IPFC 309
	550/2-1RT	-	-	-	-	-	■	■		IPFC 311
	750/2T	-	-	-	-	-	■	■		IPFC 314
	750/3-2RT	-	-	-	-	-	■	■		IPFC 318
	1000/3-1RT	-	-	-	-	-	■	■		IPFC 325
	1000/3T	-	-	-	-	-	■	■		
	1000/4-2RT	-	-	-	-	-	■	■		IPFC 330
	1500/4-1RT	-	-	-	-	-	■	■		
	1500/4T	-	-	-	-	-	■	■		
	1500/5-2RT	-	-	-	-	-	■	■		
	1500/5-1RT	-	-	-	-	-	■	■		
	2000/5T	-	-	-	-	-	■	■		
	2000/6-2RT	-	-	-	-	-	■	■		
	2000/6-1RT	-	-	-	-	-	■	■		
	2000/6T	-	-	-	-	-	■	■		
	2000/7-2RT	-	-	-	-	-	■	■		
	2000/7-1RT	-	-	-	-	-	■	■		
P 50	400/1-1RT	-	-	-	-	-	■	■	IPFC 114	IPFC 306
	550/1T	-	-	-	-	-	■	■	-	IPFC 309
	750/2-2RT	-	-	-	-	-	■	■		IPFC 311
	1000/2T	-	-	-	-	-	■	■		IPFC 318
	1500/3-2RT	-	-	-	-	-	■	■		IPFC 325
	1500/3T	-	-	-	-	-	■	■		IPFC 330
	2000/4-2RT	-	-	-	-	-	■	■		-
	2000/4T	-	-	-	-	-	■	■		
	2500/5-2RT	-	-	-	-	-	■	■		
	2500/5T	-	-	-	-	-	■	■		
	3000/6-2RT	-	-	-	-	-	■	■		
	3000/6T	-	-	-	-	-	■	■		
	4000/7-2RT	-	-	-	-	-	■	■		
P 75	550/1-1RT	-	-	-	-	-	■	■	-	IPFC 309
	750/1T	-	-	-	-	-	■	■		IPFC 311
	1000/2-2RT	-	-	-	-	-	■	■		IPFC 318
	1500/2-1RT	-	-	-	-	-	■	■		IPFC 325
	1500/2T	-	-	-	-	-	■	■		IPFC 330
	2000/3-2RT	-	-	-	-	-	■	■		-
	2000/3-1RT	-	-	-	-	-	■	■		
	2500/3T	-	-	-	-	-	■	■		
	2500/4-2RT	-	-	-	-	-	■	■		
	3000/4-1RT	-	-	-	-	-	■	■		
	3000/4T	-	-	-	-	-	■	■		
	4000/5-2RT	-	-	-	-	-	■	■		
P 90	750/1-1RT	-	-	-	-	-	■	■	-	IPFC 311
	1000/1T	-	-	-	-	-	■	■		IPFC 318
	1500/2-2RT	-	-	-	-	-	■	■		IPFC 325
	2000/2T	-	-	-	-	-	■	■		IPFC 330